


## Light Sniper Fixed Square Dimmable

■ 03.4995.GL.DA - Gold

High-performance recessed luminaire with LED light source. Remote 220-240V power supply included.

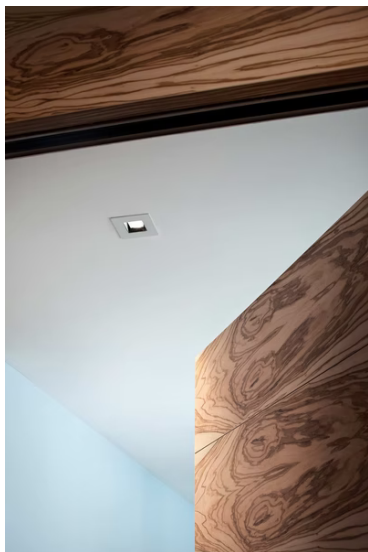


### Main specifications

Number of heads	1	Net lumen (lm)	537
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	11W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	26
Beam angle C90-270 (°)	27

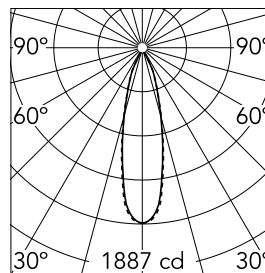

Beam Angle: 26°

h(m)	E(lx)	D(m)
1	1887	0.47
2	472	0.93
3	210	1.40
4	118	1.87
5	75	2.34


Luminous flux luminaire  
537 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable Push, Dimmable 1- 10V, Dimmable DALI 1		

### Physical

Color	Gold
Orientation	Fixed
Recessed depth (mm)	165
Weight (kg)	0.49



Light Sniper Fixed Square Dimmable




Honeycomb  
08.8412.14



Ceiling protector accessory. Square  
08.8222.30A



Elliptical light distribution lens  
08.8041.68

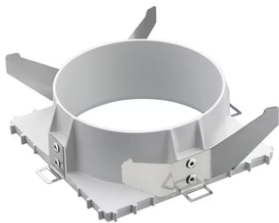

Flush ceiling square frame accessory  
08.8240.00B



Ceiling protector accessory. 50 Units  
08.8243.00.5U



Ceiling protector accessory. 10 Units  
08.8243.00.1U



Concrete instalation can.  
08.8250.00



Ceiling protector accessory. 10 Units  
08.8243.00.1U