

Super Line Up&Down Direct

■ 03.9501.14 - Black


LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately.

Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	5472
Power (W)	58W	Mountings	Suspension
System power (W)	60	Environment	Indoor dry location
CCT (K)	4000K		

Optical



Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	76
Beam angle C90-270 (°)	82
Efficiency (lm/W)	91.2



Luminous flux luminaire
5472 lm

Beam Angle DIR: 76°

h(m)	E(lx)	D(m)
1	2068	1.57
2	517	3.13
3	230	4.70
4	129	6.27
5	83	7.84

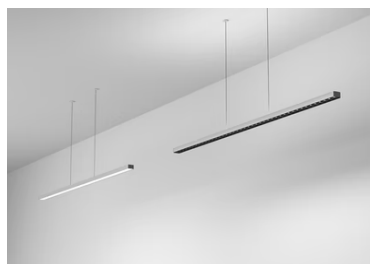

Electrical


Voltage (V)	55.80	Emergency	Without
Current (mA)	1050	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Non Dimmable, Dimmable DALI 1		

Physical


Color	Black
Orientation	Fixed
Weight (kg)	1.45
Length (mm)	1500
Lifespan (L70 B10)	L80B50

Note

Cable 4,25 m




Super Line Up&Down Direct




Surface Kit 60W. Non Dimmable
08.0520.14



Remote Power Supply Kit 60W. Dali
Version
08.0525.40



Surface Kit 60W. Dali Version
08.0521.14




Recessed Kit 60W. Dali Version
08.0523.40



Remote Power Supply Kit 60W. Non
Dimmable
08.0524.40




Remote Power Supply Kit 60W. Non
Dimmable
08.0524.14




Surface Kit 60W. Non Dimmable
08.0520.02




Remote Power Supply Kit 60W. Dali
Version
08.0525.14



Recessed Kit 60W. Non Dimmable
08.0522.14




Recessed Kit 60W. Dali Version
08.0523.14




Recessed Kit 60W. Dali Version
08.0523.02




Remote Power Supply Kit 60W. Non
Dimmable
08.0524.02




Surface Kit 60W. Dali Version
08.0521.02



Recessed Kit 60W. Non Dimmable
08.0522.02

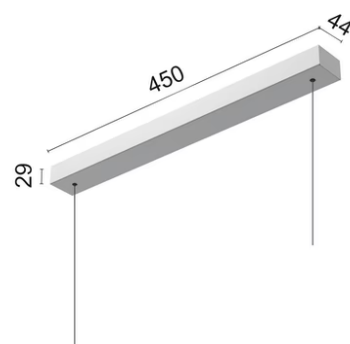


Surface Kit 60W. Dali Version
08.0521.40



Recessed Kit 60W. Non Dimmable
08.0522.40



Remote Power Supply Kit 60W. Dali
Version
08.0525.02

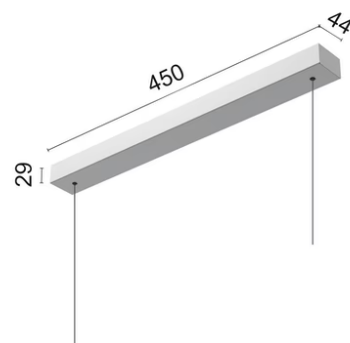

Surface Kit 60W. Non Dimmable
08.0520.40