




## 03.2001.01.DA - White

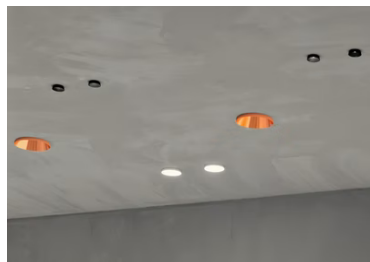

Number of heads	1
Lamp category	LED
Power (W)	6W
CCT (K)	2700K
CRI	90

<b>Net lumen (lm)</b>	352
<b>Mountings</b>	Ceiling recessed
<b>Environment</b>	Indoor dry location

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	24
Beam angle C90-270 (°)	24

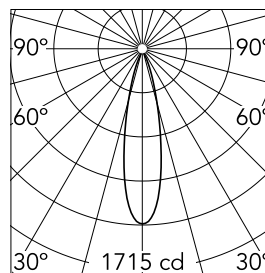

Luminous flux lumineaire  
352 lm

Beam Angle: 24°

h(m)	E(lx)	D(m)
1	1715	0.42
2	429	0.84
3	191	1.27
4	107	1.69
5	69	2.11

<b>Frequency (Hz)</b>	50/60
<b>Voltage (V)</b>	220.00
<b>Dimmable</b>	Yes
<b>Driver</b>	Remote excluded
<b>Driver type</b>	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming

Emergency	Without
Insulation class	II

Color	White
Orientation	Fixed
Recessed depth (mm)	67
Weight (kg)	0.13

Accessories included (honeycomb and cross screening cylinder). Remote power supply to be installed in an accessible place.