



Easy Kap Ø80 Fixed Optic Medium On Stock

03.4193.B1.DF - White

Recessed luminaire with LED light source. Remote 220/240V power supply included. Installation frame not necessary.

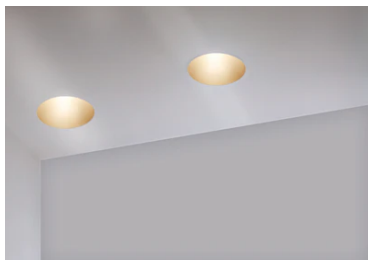


Main specifications

Number of heads	1	Net lumen (lm)	606
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9.2W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	26
Beam angle C90-270 (°)	26
Efficiency (lm/W)	65



Beam Angle: 26°

h(m)	E(lx)	D(m)
1	1796	0.46
2	449	0.92
3	200	1.39
4	112	1.85
5	72	2.31

Luminous flux luminaire
606 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Driver type	Electronic
Voltage (V)	17.40	Emergency	Without
Current (mA)	500	Insulation class	II
Dimmable	No		
Driver	Remote		

Physical

Color	White
Orientation	Fixed
Recessed depth (mm)	91
Weight (kg)	0.24
Spot diameter (mm)	80

Note

Diffusing lens included

