

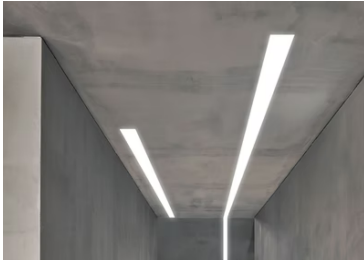


In-Finity 100 Recessed No Trim 4000K General Lighting Dali

■ N10N144G30BDA - White

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.




Main specifications

| | | | |
|-----------------------|---------|--------------------|---------------------|
| Lamp category | LED | Mountings | Recessed |
| Power (W) | 25.5W/m | Environment | Indoor dry location |
| CCT (K) | 4000K | | |
| CRI | 80 | | |
| Net lumen (lm) | 4150 | | |

Optical

| | |
|-------------------------------|----------------|
| Lighting type | Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 103 |
| Beam angle C90-270 (°) | 107 |

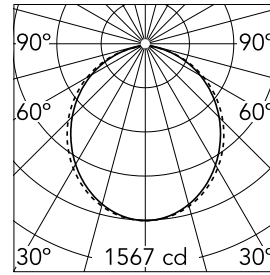

Beam Angle: 103°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 1567 | 2.54 |
| 2 | 392 | 5.07 |
| 3 | 174 | 7.61 |
| 4 | 98 | 10.14 |
| 5 | 63 | 12.68 |

Luminous flux luminaire
4150 lm

Electrical

| | | | |
|-----------------------|---------------|-------------------------|---|
| Frequency (Hz) | 50/60 | Insulation class | I |
| Dimmable | Yes | | |
| Driver | Integrated | | |
| Driver type | Dimmable DALI | | |
| | 1 | | |
| Emergency | Without | | |

Physical


| | |
|----------------------------|-------|
| Color | White |
| Orientation | Fixed |
| Recessed depth (mm) | 135 |
| Weight (kg) | 11 |
| Length (mm) | 1405 |

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 100 Recessed No Trim 4000K General Lighting Dali

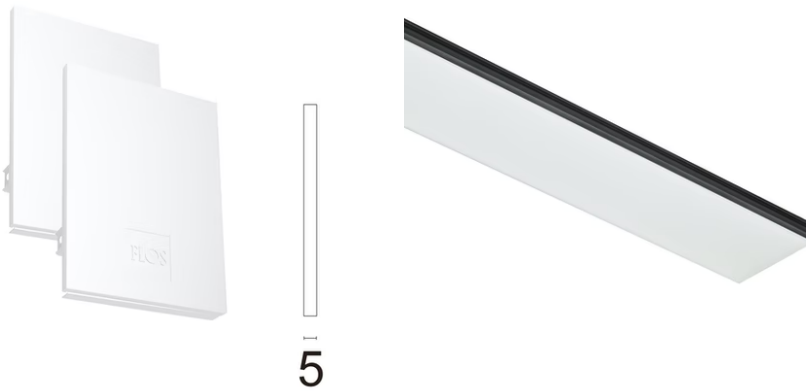

Metal End Cap. Recessed No Trim /
Surface / Suspension Down. 100 mm
(Colour White)
08.9054.40

500 mm opal diffuser. Diffuse, glare
free and uniform lighting throughout
the room
08.0111.00