



## In-Finity 100 Recessed No Trim Flat Corner 4000K General Lighting Dali

■ N10NFC4G30BDA - White

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

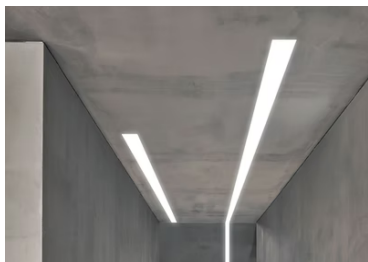


### Main specifications

Number of heads	1	Net lumen (lm)	3320
Lamp category	LED	Mountings	Recessed
Power (W)	25.5W/m	Environment	Indoor dry location
CCT (K)	4000K		
CRI	80		

### Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	103
Beam angle C90-270 (°)	107



Luminous flux luminaire  
3320 lm

Beam Angle: 103°		
<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>
1	1254	2.54
2	313	5.07
3	139	7.61
4	78	10.14
5	50	12.68

### Electrical

Frequency (Hz)	50/60	Insulation class	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable DALI		
	1		
Emergency	Without		


### Physical

Color	White
Orientation	Fixed
Recessed depth (mm)	135
Weight (kg)	8.20

### Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 100 Recessed No Trim Flat Corner 4000K General Lighting Dali

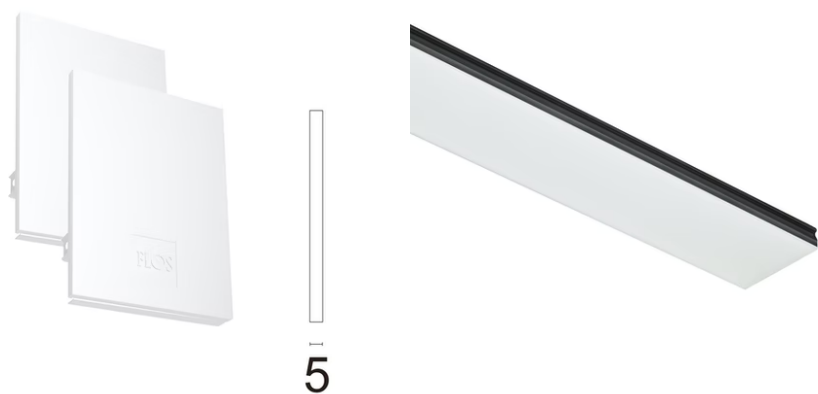

Metal End Cap. Recessed No Trim /  
Surface / Suspension Down. 100 mm  
(Colour White)  
08.9054.40

500 mm opal diffuser. Diffuse, glare  
free and uniform lighting throughout  
the room  
08.0111.00