

In-Finity 100 Recessed Trim 4000K General Lighting Dali

■ N10T144G14BDA - Black


LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications

Lamp category	LED	Mountings	Recessed
Power (W)	25.5W/m	Environment	Indoor dry location
CCT (K)	4000K		
CRI	80		
Net lumen (lm)	4150		

Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	103
Beam angle C90-270 (°)	107



Beam Angle: 103°

h(m) E(lx) D(m)

1 1567 2.54

2 392 5.07

3 174 7.61

4 98 10.14

5 63 12.68

Luminous flux luminaire
4150 lm

Electrical




Frequency (Hz)	50/60	Insulation class	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable DALI		
	1		
Emergency	Without		

Physical

Color	Black
Orientation	Fixed
Recessed depth (mm)	135
Weight (kg)	11
Length (mm)	1405

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

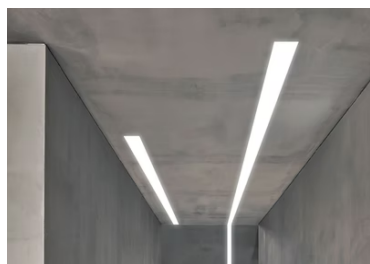

In-Finity 100 Recessed Trim 4000K General Lighting Dali



5

Metal cover. Recessed Trim. 100 mm
(Colour Anodized Grey)
08.9055.02



5

Metal cover. Recessed Trim. 100 mm
(Colour White)
08.9055.40



5

Metal cover. Recessed Trim. 100 mm
(Colour Black)
08.9055.NS



500 mm opal diffuser. Diffuse, glare
free and uniform lighting throughout
the room
08.0111.00