




In-Finity 100 Recessed Trim Dihedral Corner 3000K General Lighting

N10TDC3G02B - Anodized Grey

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.


Main specifications

Number of heads	1	Net lumen (lm)	3111
Lamp category	LED	Mountings	Recessed
Power (W)	25.5W/m	Environment	Indoor
CCT (K)	3000K		
CRI	80		

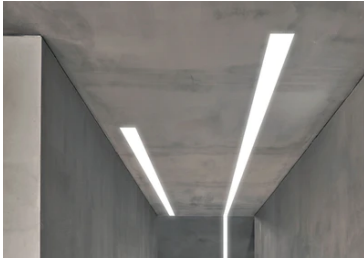

Optical


Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	103
Beam angle C90-270 (°)	107



Beam Angle: 103°

	h(m)	E(lx)	D(m)
1	1175	2.54	
2	294	5.07	
3	131	7.61	
4	73	10.14	
5	47	12.68	

Luminous flux luminaire
3111 lm



Electrical

Frequency (Hz)	50/60	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Electronic		
Emergency	Without		

Physical

Color	Anodized Grey
Orientation	Fixed
Recessed depth (mm)	135
Weight (kg)	8.20

Certification / Marking



Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps