

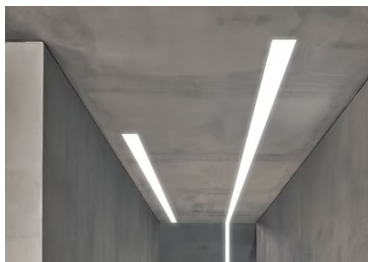


## In-Finity 100 Recessed Trim Flat Corner 3000K Micro-Prismatic Diffuser Dali

### ■ N10TFC3U14BDA - Black

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

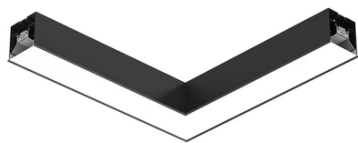


### Main specifications

Number of heads	1	Net lumen (lm)	2968
Lamp category	LED	Mountings	Recessed
Power (W)	25.5W/m	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

### Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	73
Beam angle C90-270 (°)	81

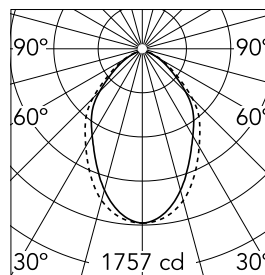

Luminous flux luminaire  
2968 lm

Beam Angle:		73°
h(m)	E(lx)	D(m)
1	1757	1.47
2	439	2.95
3	195	4.42
4	110	5.90
5	70	7.37

### Electrical

Frequency (Hz)	50/60	Insulation class	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable DALI		
	1		
Emergency	Without		

### Physical

Color	Black
Orientation	Fixed
Recessed depth (mm)	135
Weight (kg)	8.20

### Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

## In-Finity 100 Recessed Trim Flat Corner 3000K Micro-Prismatic Diffuser Dali



5

Metal cover. Recessed Trim. 100 mm  
(Colour Black)  
08.9055.NS



500 mm micro-prismatic diffuser.  
Highly efficient multilayer diffuser  
that, thanks to its unique  
microprismatic texture, provides a  
glare free UGR<19 light beam  
08.0114.00



5

Metal cover. Recessed Trim. 100 mm  
(Colour Anodized Grey)  
08.9055.02



5

Metal cover. Recessed Trim. 100 mm  
(Colour White)  
08.9055.40