



## In-Finity 35 Recessed No Trim Dihedral Corner 4000K Micro-Prismatic Diffuser

■ N35NDC4U30B - White


LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### Main specifications

Number of heads	1	Net lumen (lm)	1107
Lamp category	LED	Mountings	Recessed no trim
Power (W)	22.5W	Environment	Indoor dry location
CCT (K)	4000K		
CRI	80		



### Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	76
Beam angle C90-270 (°)	64



Luminous flux luminaire  
1107 lm

Beam Angle:	75°	
h(m)	E(lx)	D(m)
1	717	1.25
2	179	2.50
3	80	3.76
4	45	5.01
5	29	6.26

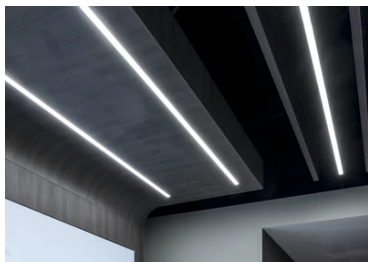

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		

### Physical


Color	White
Orientation	Fixed
Recessed depth (mm)	120
Weight (kg)	3.16
Length (mm)	546

### Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



## In-Finity 35 Recessed No Trim Dihedral Corner 4000K Micro-Prismatic Diffuser

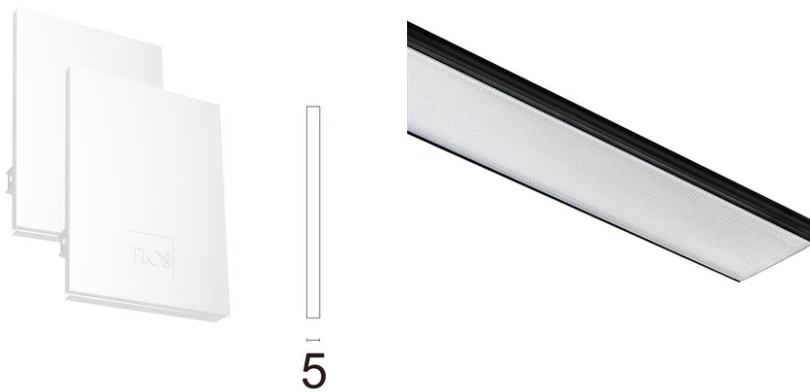

---

Metal End Cap. Recessed No Trim /  
Surface / Suspension Down. 35 mm  
(Colour White)  
08.9050.40

---

500 mm micro-prismatic diffuser.  
Highly efficient multilayer diffuser  
that, thanks to its unique  
microprismatic texture, provides a  
glare free UGR<19 light beam  
08.0112.00