

**In-Finity 35 Surface Emergency 4000K General Lighting Dali****■ N35SEM4G02BDA - Anodized Grey**

LED modular system for surface installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

**Main specifications**

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	1779
<b>Lamp category</b>	LED	<b>Mountings</b>	Surface
<b>Power (W)</b>	28W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	4000K		
<b>CRI</b>	80		

**Optical**

<b>Lighting type</b>	Direct	<b>Beam angle C90-270 (°)</b>	110
<b>LED type</b>	Top LED		
<b>Light distribution</b>	Symmetric		
<b>Optical type</b>	Diffused light		
<b>Beam angle (°)</b>	110		

**Electrical**




<b>Voltage (V)</b>	220.00	<b>Insulation class</b>	I
<b>Dimmable</b>	Yes		
<b>Driver</b>	Integrated		
<b>Driver type</b>	Dimmable DALI		
	1		
<b>Emergency</b>	With		

**Physical**

<b>Color</b>	Anodized Grey
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	3.19
<b>Length (mm)</b>	1405

**Note**

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

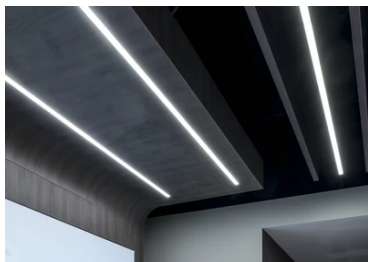

In-Finity 35 Surface Emergency 4000K General Lighting Dali



500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room  
08.0109.00



5

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Anodized Grey)  
08.9050.02



5

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour White)  
08.9050.40



5

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Black)  
08.9050.NS



5

Metal cover. Surface / Suspension Down. 35 mm  
08.9050.06