

## In-Finity 70 Recessed Trim 4000K Micro-Prismatic Diffuser

■ N70T114U30B - White


LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### Main specifications

<b>Lamp category</b>	LED	<b>Mountings</b>	Recessed
<b>Power (W)</b>	23.1W/m	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	4000K		
<b>CRI</b>	80		
<b>Net lumen (lm)</b>	1636		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Top LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Diffused light
<b>Beam angle (°)</b>	67
<b>Beam angle C90-270 (°)</b>	76

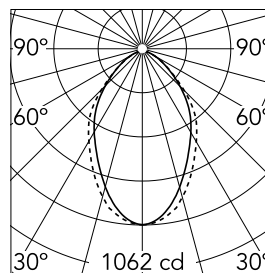

Beam Angle: 67°

h(m) E(lx) D(m)

1 1062 1.33

2 265 2.66

3 118 3.99

4 66 5.32

5 42 6.65

Luminous flux luminaire  
1636 lm

### Electrical



<b>Frequency (Hz)</b>	50/60	<b>Insulation class</b>	I
<b>Dimmable</b>	No		
<b>Driver</b>	Integrated		
<b>Driver type</b>	Non Dimmable		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	White
<b>Orientation</b>	Fixed
<b>Recessed depth (mm)</b>	135
<b>Weight (kg)</b>	5
<b>Length (mm)</b>	1125

### Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

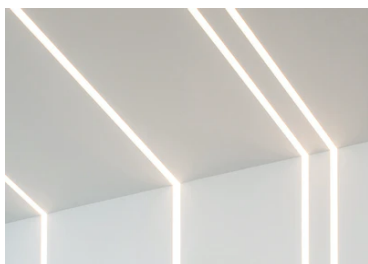

## In-Finity 70 Recessed Trim 4000K Micro-Prismatic Diffuser



5



5

500 mm micro-prismatic diffuser.  
Highly efficient multilayer diffuser  
that, thanks to its unique  
microprismatic texture, provides a  
glare free UGR<19 light beam  
08.0113.00

Metal cover. Recessed Trim. 70 mm  
(Colour Anodized Grey)  
08.9053.02

Metal cover. Recessed Trim. 70 mm  
(Colour Black)  
08.9053.NS



5

Metal cover. Recessed Trim. 70 mm  
(Colour White)  
08.9053.40