

In-Finity 70 Surface Dihedral Corner 3000K Micro-Prismatic Diffuser

■ N70SDC3U02B - Anodized Grey


LED modular system for surface installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications

Number of heads	1	Net lumen (lm)	1511
Lamp category	LED	Mountings	Surface
Power (W)	23.1W/m	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical



Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	67
Beam angle C90-270 (°)	76

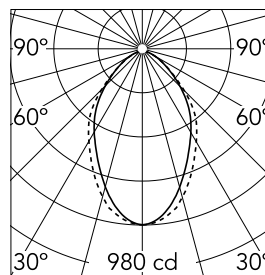

Beam Angle: 67°

	h(m)	E(lx)	D(m)
1	980	1.33	
2	245	2.66	
3	109	3.99	
4	61	5.32	
5	39	6.65	

Luminous flux luminaire
1511 lm

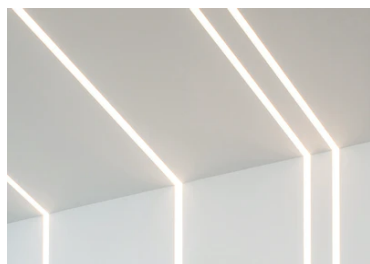

Electrical


Frequency (Hz)	50/60	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		
Emergency	Without		

Physical

Color	Anodized Grey
Orientation	Fixed
Weight (kg)	4.10

Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

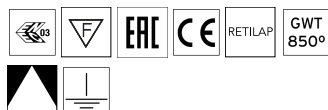

In-Finity 70 Surface Dihedral Corner 3000K Micro-Prismatic Diffuser



5

Metal cover. Surface / Suspension
Down. 70 mm
08.9052.06



5

Metal End Cap. Recessed No Trim /
Surface / Suspension Down. 70 mm
(Colour Anodized Grey)
08.9052.02



5

Metal End Cap. Recessed No Trim /
Surface / Suspension Down. 70 mm
(Colour Black)
08.9052.NS



5

Metal End Cap. Recessed No Trim /
Surface / Suspension Down. 70 mm
(Colour White)
08.9052.40



500 mm micro-prismatic diffuser.
Highly efficient multilayer diffuser
that, thanks to its unique
microprismatic texture, provides a
glare free UGR<19 light beam
08.0113.00