

In-Finity 70 Surface Emergency 4000K General Lighting

■ N70SEM4G02B - Anodized Grey

LED modular system for surface installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications

Lamp category	LED	Environment	Indoor dry location
Power (W)	23.1W/m		
CCT (K)	4000K		
CRI	80		
Mountings	Surface		

Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	103

Electrical



Dimmable	No
Driver	Integrated
Driver type	Non Dimmable
Emergency	Without
Insulation class	I

Physical

Color	Anodized Grey
Orientation	Fixed
Length (mm)	1400

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

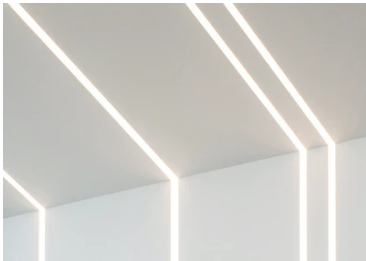

108
69
73



In-Finity 70 Surface Emergency 4000K General Lighting



5

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 70 mm (Colour Anodized Grey)
08.9052.02



5

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 70 mm (Colour Black)
08.9052.NS




500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room
08.0110.00



5

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 70 mm (Colour White)
08.9052.40



5

Metal cover. Surface / Suspension Down. 70 mm
08.9052.06