

## Kap Ø145 Wall-Washer

 03.4588.GL - Gold


Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

## Main specifications

|                 |       |                |                  |
|-----------------|-------|----------------|------------------|
| Number of heads | 1     | Net lumen (lm) | 1185             |
| Lamp category   | LED   | Mountings      | Ceiling recessed |
| Power (W)       | 17W   | Environment    | Indoor           |
| CCT (K)         | 3000K |                |                  |
| CRI             | 90    |                |                  |

## Optical

|                        |                  |
|------------------------|------------------|
| Lighting type          | Indirect, Direct |
| LED type               | LED array        |
| Light distribution     | Asymmetric       |
| Optical type           | Wall-washer      |
| Beam angle (°)         | 55               |
| Beam angle C90-270 (°) | 59               |
| Efficiency (lm/W)      | 69               |



Beam Angle: 54°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 1253  | 1.13 |
| 2    | 313   | 2.26 |
| 3    | 139   | 3.39 |
| 4    | 78    | 4.52 |
| 5    | 50    | 5.65 |

Luminous flux luminaire  
1185 lm (EXTREME CUT OFF)

## Electrical



|                |            |                  |         |
|----------------|------------|------------------|---------|
| Frequency (Hz) | 50/60      | Emergency        | Without |
| Voltage (V)    | 27.40      | Insulation class | II      |
| Dimmable       | No         |                  |         |
| Driver         | Remote     |                  |         |
| Driver type    | Electronic |                  |         |

## Physical


|                    |       |
|--------------------|-------|
| Color              | Gold  |
| Orientation        | Fixed |
| Weight (kg)        | 0.94  |
| Spot diameter (mm) | 145   |

## Note


Pre-installation frame. To be ordered separately.

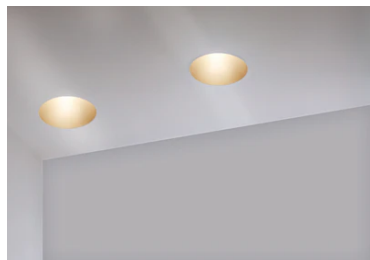

\*NO TRIM  
\*\*TRIM



Kap Ø145 Wall-Washer



---

Installation Frame Trim  
08.8491.BU

---

Installation Frame Trim  
08.8491.14

---

Installation Frame No Trim  
08.8251.00



---

Installation Frame Trim  
08.8491.30

---

Installation Frame Trim  
08.8491.GL