Light Shadow Adjustable No Trim 12 Spots Optic Spot

03.8945.40A - White/Black

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

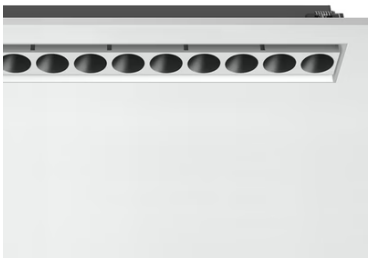

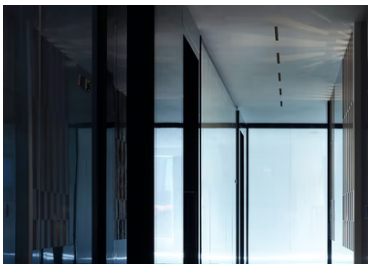



Main specifications

Number of heads	1	**Net lumen (lm)**	2773
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	32.4W	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10



Luminous flux luminaire
2773 lm (EXTREME CUT OFF)

Beam Angle: 10°

h(m)	E(lx)	D(m)
1	50052	0.18
2	12513	0.36
3	5561	0.54
4	3128	0.72
5	2002	0.90

Electrical

Frequency (Hz)	50/60	**Insulation class**	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

Physical

Color	White/Black	**Length (mm)**	429
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.66		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Adjustable No Trim 12 Spots Optic Spot

Pre-installation Frame
08.0518.00

Accessory for mounting of No Trim continuous line.
08.0059.90