



### Light Shadow Fixed Trim 2 Spots Optic Flood

03.9107.40A - White/Chrome

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

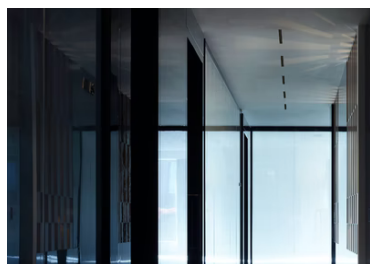


#### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 454                 |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 5.4W  | Environment    | Indoor dry location |
| CCT (K)         | 2700K |                |                     |
| CRI             | 90    |                |                     |

#### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Flood     |
| Beam angle (°)         | 33        |
| Beam angle C90-270 (°) | 33        |



Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 1405  | 0.60 |
| 2    | 351   | 1.19 |
| 3    | 156   | 1.79 |
| 4    | 88    | 2.38 |
| 5    | 56    | 2.98 |

Luminous flux luminaire  
454 lm (EXTREME CUT OFF)

#### Electrical

|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

#### Physical

|                     |              |             |    |
|---------------------|--------------|-------------|----|
| Color               | White/Chrome | Length (mm) | 77 |
| Orientation         | Fixed        |             |    |
| Trim                | yes          |             |    |
| Recessed depth (mm) | 150          |             |    |
| Weight (kg)         | 0.25         |             |    |

#### Note

Pre-installation frame not required.

