Light Shadow Fixed Trim Dali Version 8 Spots Optic Wide Flood

03.8320.14ADA - Black/White

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

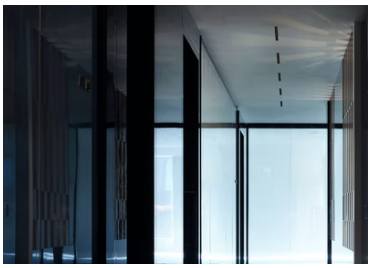



Main specifications

Number of heads	1	**Net lumen (lm)**	1847
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	21.6W	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	45
Beam angle C90-270 (°)	45



Luminous flux luminaire
1847 lm (EXTREME CUT OFF)

Beam Angle: 45°

h(m)	E(lx)	D(m)
1	3443	0.83
2	861	1.67
3	383	2.50
4	215	3.34
5	138	4.17

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220.00	**Insulation class**	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI 1		

Physical

Color	Black/White	**Length (mm)**	287
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.50		

Note

Pre-installation frame not required.