

## Light Shadow Optic Medium Casambi integrated

New

### 03.9632.14ACB - Black/Chrome

LED lighting module, with 4 spotlights and low glare, to be installed in the The Running Magnet system. DC/DC, built-in electronic current converter.




### Main specifications

<b>Lamp category</b>	LED	<b>Mountings</b>	Track
<b>Power (W)</b>	10.8W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		
<b>Net lumen (lm)</b>	802		

### Optical



<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Medium
<b>Beam angle (°)</b>	22
<b>Beam angle C90-270 (°)</b>	22



Beam Angle: 22°

h(m)	E(lx)	D(m)
1	5397	0.39
2	1349	0.77
3	600	1.16
4	337	1.55
5	216	1.94

Luminous flux luminaire  
802 lm (EXTREME CUT OFF)

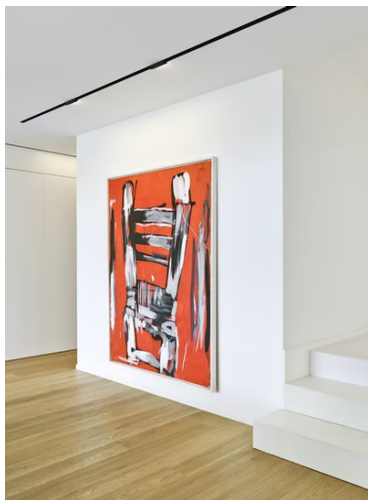

### Electrical

<b>Voltage (V)</b>	24.00	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Dimmable		
<b>Emergency</b>	Casambi		
	Without		

### Physical

<b>Color</b>	Black/Chrome
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	0.34
<b>Length (mm)</b>	140

### Note

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

