

Light Shadow Optic Spot On Board Dimmer

■ 03.8948.14A - Black/White

LED lighting module, with 4 spotlights and low glare, to be installed in the The Running Magnet system. DC/DC, built-in electronic current converter.




Main specifications

Lamp category	LED	Net lumen (lm)	751
Power (W)	10.8W	Mountings	Track
System power (W)	13.4	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		


Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10
UGRL	4
Efficiency (lm/W)	56.04



Beam Angle:	10°	
	h(m)	E(lx) D(m)
	1	13743 0.17
	2	3436 0.35
	3	1527 0.52
	4	859 0.70
	5	550 0.87

Luminous flux luminaire
751 lm (EXTREME CUT OFF)

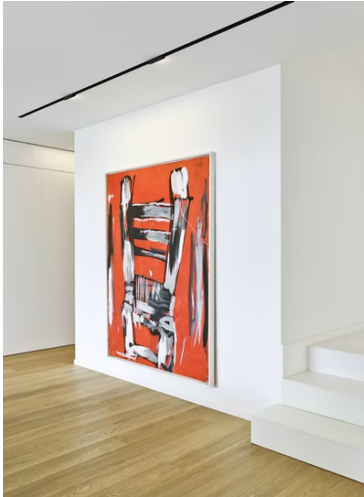

Electrical

Voltage (V)	24.00	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Dimmer on board		
Emergency	Without		

Physical

Color	Black/White
Orientation	Fixed
Weight (kg)	0.34
Length (mm)	140
Lifespan (L70 B10)	L80B50

Note

For wireless lighting control, choose integrated Casambi versions.

