



## Light Shadow Pro Ø60 Fixed Optic Flood

03.9956.40 - White


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

### Main specifications

Number of heads	1	Net lumen (lm)	1247
Lamp category	LED	Mountings	Recessed
Power (W)	15W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	34
Beam angle C90-270 (°)	34

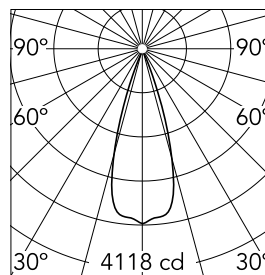

Beam Angle: 34°

	h(m)	E(lx)	D(m)
1	4118	0.61	
2	1030	1.22	
3	458	1.83	
4	257	2.44	
5	165	3.05	




Luminous flux luminaire  
1247 lm

### Electrical

Current (mA)	400	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimnable 1- 10V, Electronic dimnable DALI		
Emergency	Without		

### Physical

Color	White
Orientation	Fixed
Recessed depth (mm)	91
Weight (kg)	0.22
Spot diameter (mm)	60

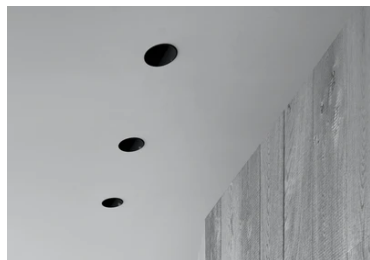

Light Shadow Pro Ø60 Fixed Optic Flood



Installation Frame Trim  
08.0160.40



Installation Frame Trim  
08.0160.14



Installation Frame No Trim  
08.0162.00



Non dimmable continuous current  
power supply of 220/240V – 50/60Hz  
with power current selected through  
adjustable with switch 200mA – 8,5W /  
250mA – 11W / 300mA – 13W / 350mA –  
15W / 400mA – 17,5W / 450mA 19,5W /  
500mA – 22W.  
60.9160



Continuous current power supply, 0/1-  
10V dimmable, 220/240V – 50/60Hz,  
36W – 700 mA  
60.9439



Continuous current supply source of  
240V – 50/60Hz with dimmable DALI 2  
60.9186



Continuous current power supply of  
18-28W 220/240V – 50/60Hz



Continuous current power supply of  
18-28W 220/240V – 50/60Hz



Continuous current power supply of  
18-28W 220/240V – 50/60Hz

switch  
60.9162



adjustable switch. 1-10V or push  
dimming.  
60.9188



adjustable. Regulable DALI 1 y DALI 2  
60.9222

---

Continuous current power supply,  
Mains dimming 220/240V – 50/60Hz, 12-  
20W  
60.9467

---

Continuous current power supply,  
dimmable Casambi, 220/240V –  
50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207