

Light Tube Ø 30 Direct 1200 mm Dali Version

03.8106.40.DA - White

Diffused LED light module to be installed in The Infra-Structure.




Main specifications

| | | | |
|------------------|-------|----------------|---------------------|
| Number of heads | 1 | CRI | 90 |
| Lamp category | LED | Net lumen (lm) | 1890 |
| Power (W) | 30W | Mountings | Track |
| System power (W) | 30 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |


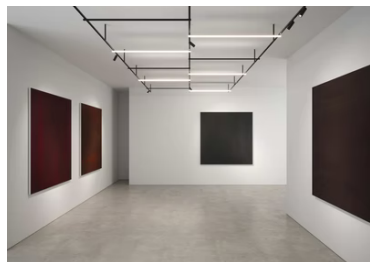
Optical

| | |
|------------------------|----------------|
| Lighting type | Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 106 |
| Beam angle C90-270 (°) | 106 |
| Efficiency (lm/W) | 63 |



Beam Angle: 106°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 463 | 7.49 |
| 2 | 116 | 14.98 |
| 3 | 51 | 22.47 |
| 4 | 29 | 29.96 |
| 5 | 19 | 37.45 |

Luminous flux luminaire
1890 lm

Electrical

| | | | |
|-------------|-----------------|------------------|-----|
| Voltage (V) | 48 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Dimmable DALI | | |
| | 1 | | |
| Emergency | Without | | |

Physical

| | |
|--------------------|--------|
| Color | White |
| Orientation | Fixed |
| Weight (kg) | 1 |
| Length (mm) | 1244 |
| Lifespan (L70 B10) | L80B50 |

Note

System turning fastening elements 0°-90° with a magnetic connection and mechanic security back for a transversally installation between two lines of the profile. The Light Tube are only fed by one of the ends and do not communicate current through the other end. For wireless lighting control, choose integrated Casambi versions.

