



UT Spot Track Ø 57 GA Dali Version

■ 09.7700.14ADA - Black


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

Main specifications

| | | | |
|------------------|-------|----------------|---------------------|
| Number of heads | 1 | CRI | 80 |
| Lamp category | LED | Net lumen (lm) | 1255 |
| Power (W) | 23.5W | Mountings | Track |
| System power (W) | 23.2 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |

Optical


| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 10 |
| Beam angle C90-270 (°) | 10 |



Beam Angle: 10°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 14650 | 0.18 |
| 2 | 3662 | 0.36 |
| 3 | 1628 | 0.54 |
| 4 | 916 | 0.72 |
| 5 | 586 | 0.90 |

Luminous flux luminaire
1255 lm

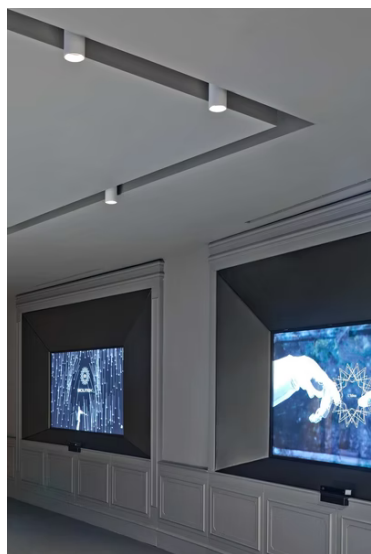

Electrical



| | | | |
|----------------|------------|------------------|-----------------|
| Frequency (Hz) | 50/60 | Driver type | Dimmable DALI 1 |
| Voltage (V) | 220-240V | Emergency | Without |
| Current (mA) | 550 | Insulation class | II |
| Dimmable | Yes | | |
| Driver | Integrated | | |

Physical


| | | | |
|--------------|------------|--------------------|----|
| Color | Black | Spot diameter (mm) | 57 |
| Orientation | Adjustable | | |
| Weight (kg) | 0.57 | | |
| Tilt (°) | 90 | | |
| Rotation (°) | 360 | | |

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.



UT Spot Track Ø 57 GA Dali Version



Screening crosspiece
08.8429.00

Snoot shielding cone
08.0526.BW

Elliptical lens
08.8431.00



Flood lens
08.8432.00

Snoot shielding cone
08.0526.40

Snoot shielding cone
08.0526.00



Honeycomb
08.8428.00