Captain Flint Outdoor W1

F011W40A030 - Black

Luminaire for wall-mounting with diffuse light emission and fixed head.
Rose, frame and cone in 316L polished or painted stainless steel or polished brass finishes. Structural parts have been treated with a chemical conversion process for effective resistance against atmospheric conditions. Diffuser in photo-recorded and injection molded UV-resistant opalescent polycarbonate. LED light source included.
Integrated 220-240V ON/OFF electrical power.
Connection is quickly ensured in the rose with the plug & play electrical connection and the IP68 connector included. Clamp bracket included.

110V version upon request

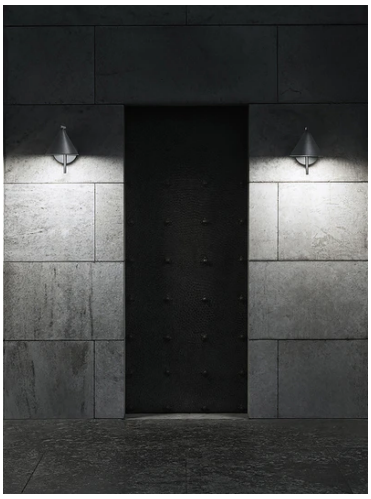



IP 65 | IK 07 | CE | DIFFUSED LIGHT

Main specifications

Number of heads	1	**Net lumen (lm)**	703
Lamp category	LED	**Mountings**	Ceiling and wall surface
Power (W)	11		
CCT (K)	4000K		
CRI	80		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	112
Beam angle C90-270 (°)	112



Luminous flux luminaire
703 lm

Beam Angle: 112°

h(m)	E(lx)	D(m)
1	249	2.95
2	62	5.91
3	28	8.86
4	16	11.81
5	10	14.76

Electrical

Frequency (Hz)	50-60	**Emergency**	Without
Voltage (V)	220-240	**Insulation class**	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		

Physical

Color	Black
Orientation	Fixed
Weight (kg)	2.1
Spot diameter (mm)	208
Length (mm)	336

Note

110V version upon request.