

Maxi Martina Rgb

■ 10525612.8 - Anodized Aluminium

Adjustable spotlight.

Configuration: turned and anodized (raw or painted) aluminium structure with stainless steel adjustable bracket.

Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system.

Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.

Protection rating: IP67

In compliance with EN60598-1 standards

Class of insulation: III

Installation: the luminaire is equipped with 2000mm cable. Martina 24V and Maxi Martina 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina, Martina RGB and Maxi Martina RGB requires connection in series.

We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

Main specifications

Power (W)	13.6
System power (W)	13.6
Mountings	Ceiling, Ground, Wall surface
Environment	Outdoor wet location

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot

Electrical

Frequency (Hz)	50-60
Dimmable	Yes
Driver type	Dimmable DMX
Emergency	Without
Insulation class	III

Physical

Color	Anodized Aluminium
--------------	-----------------------

Maxi Martina Rgb



Dmx Controller Dimmer Switch For
Recessed Box
142




Power Supply Dmx Rgb 36W
220÷230V/3Chx350mA Ip67
141



Ground Spike Martina/Mini
Martina/Perseo 9/Iota
136



Dmx Cable Shielded Twisted Pair
186

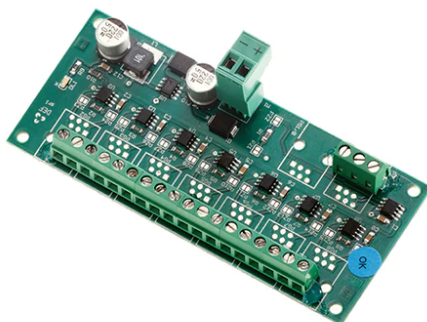

DMX splitter 512 – electronic device to
regenerate the monodirectional DMX
signal 1 Input and 7 output, 12-
24Vdc_IP20. Power supply not included
187



Dmx Controller Stand-Alone/Pc
Interface
143